

Pro-Grade LCD Video Test Monitor

Feature


- ★ 3.5" LCD Video Test Monitor
- ★ Video Test Function
- ★ Video Pattern Generating Function
- ★ RS485 Data Analyst Test Function
- ★ PTZ Cam Control and Test Function up to 255 PTZ Cam
- ★ Powered by Power Adapter or Rechargeable Battery (5 hrs)
- ★ DC 12V Power Output to Camera
- ★ Built-in Speaker for Audio Testing
- ★ New Design w/ Number Buttons
- ★ Wrist Strap



Specification



Dimension (mm)

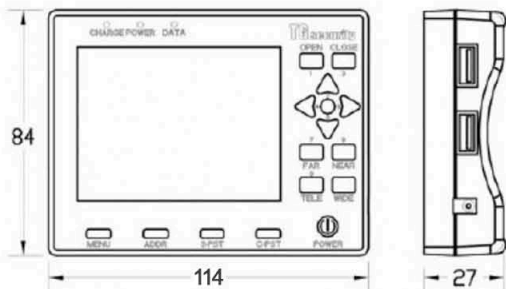

Model	APT035	
Video Test	Signal Mode	NTSC/PAL automatically suitable
	Display	3.5 inch LCD screen, 960 x 240 resolution
	Video Input	1 channel BNC
	Video Output	1 channel BNC
	Adjustable	Brightness adjustable
PTZ Control and Test	Communication	RS232, RS422 simplex and RS485
	Protocol	Include more than 20 kinds of protocols or customized
	Baud Rate	24,004,800,960,019,200
Multi-meter Function	DC Voltage Test	Max: 1000V, Precision: 0.1mV
	AC Voltage Test	Max: 750V, Precision: 0.1mV
	Resistance Test	Max: 40MΩ, Precision: 0.1Ω
Power to Camera	Voltage	DC12V
	Working Time	3-5 hours to normal camera
	Max Current	600mA
Other Functions	Video analyzing	Video signal attenuation analyzing
	UTP Cable Test	Test UTP cable connection state
	Signal Generating	Output 1 channel video signal for testing monitor
	RS485 Data Test	Test the RS485 data sent from controlling device
	OSD Menu	English OSD menu
	Keyboard	New design with number buttons, easy to operation
	Power and Battery	Power Adapter
Battery		7.4V 1500mAh Lithium battery inside
Rechargeable		6 hours recharging time
Low Consumption		Sleeping mode, display battery power state
Working Time		10 hours
Others	Work Temperature	-30°C --- +70°C
	Work Humidity	30%-90%
	Dimension	114mm x84mm x27mm / 4.5" x 3.3" x 1.1"
	Weight	340g / 0.75lb