

Outdoor Color Mini Bullet CCD Camera


CMB1380 / 1530 CMB3380 / 3480

Features

- 380 / 480 / 530 TVL resolution
- Auto tracing white balance
- 0.2 / 0.5 lux of minimum illumination
- Automatic gain control
- IP 64 protection rate



Digital

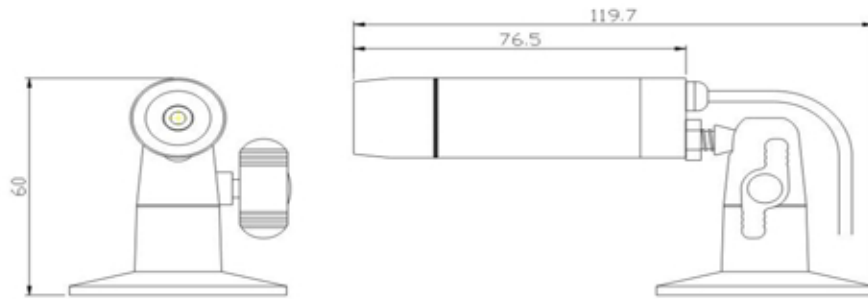

SPECIFICATIONS:

Model No.	CMB-1380	CMB-1530
Power requirements	DC 12V	
Synchronization	Internal	
Image device	1/3" SONY Super-HAD CCD	
Picture elements	PAL: 500 x 582, NTSC: 512 x 492	PAL: 752 x 582, NTSC: 768 x 494
Scanning system	PAL: 625 lines, NTSC: 525 lines, 2:1 interface	
Horizontal resolution	380 TV Lines	530 TV Line
Min. illumination	0.2 lux @F2.0	
Aperture correction	Horizontal & Vertical 2H enhancer	
Signal to noise ratio	Better than 50 dB	
Auto gain control	YES	
Auto electronic shutter	AES: 1/50(60) ~ 1/100,000 sec.	
White balance	AWB	
IP rate	IP 64	
BL compensation	Auto detect, Histogram & Central window weighted	
Gamma correction	0.45	
Video output	1Vp-p, 75Ω composite, BNC connector	
Operating temperature	-10°C ~ 50°C (14°F ~ 122°F)	
Lens	3.6mm @F2.0	
Dimensions	22mm x 76mm (φ x w)	

Model No.	CMB-3380	CMB-3480
Power requirements	DC 12V	
Synchronization	Internal	
Image device	1/3" SHARP CCD	
Picture elements	PAL: 500 x 582, NTSC: 512 x 492	PAL: 752 x 582, NTSC: 768 x 494
Scanning system	PAL: 625 lines, NTSC: 525 lines, 2:1 interface	
Horizontal resolution	380 TV Lines	480 TV Line
Min. illumination	0.5 lux @F2.0	
Aperture correction	Horizontal & Vertical 2H enhancer	
Signal to noise ratio	Better than 50 dB	
Auto gain control	YES	
Auto electronic shutter	AES: 1/50(60) ~ 1/100,000 sec.	
White balance	AWB	
IP rate	IP 64	
Gamma correction	0.45	
Video output	1Vp-p, 75Ω composite, BNC connector	
Operating temperature	-10°C ~ 50°C (14°F ~ 122°F)	
Lens	3.6mm @F2.0	
Dimensions	22mm x 76mm (φ x w)	